



Consommation  
et Corporations Canada

Consumer and  
Corporate Affairs Canada

Bureau des brevets

Patent Office

Ottawa, Canada  
K1A 0C9

(11)	(C)	<b>1,305,628</b>
(21)		540,683
(22)		1987/06/26
(45)		1992/07/28
(52)		97-75
C.L.	CR.	97-71.5

(51) INTL.CL.<sup>5</sup> A01B-23/02; A01B-21/04

(19) (CA) **CANADIAN PATENT** (12)

(54) Tool

(72) Phillips, Laurence C. , Australia

(73) Same as inventor

(30) (AU) Australia PH06619 1986/06/27

(57) 19 Claims

**Canada**

1

5

C

三

1        THIS INVENTION relates to a ground working tool and to a  
tool element for such a ground working tool.

5        It is known in agriculture to provide a ground working  
tool in the form of a so-called prickle chain which  
consists of a chain with projecting metal fingers welded  
along the length of the chain, preferably with at least  
one finger on each chain link. The prickle chain is  
10       rotatably supported at its ends in such a manner as to  
allow the chain to rotate when it is dragged in a  
generally sideways direction across the ground. The  
rotating action of the chain works the ground for tilling,  
secondary cultivation, ground levelling, trash removal  
and/or other ground working operations.

15       A prickle chain has the disadvantage that it is awkward  
and time consuming to construct owing to the fact that the  
fingers have to be welded onto the chain links at a  
variety of angular positions along the length of the  
chain.

20       The present invention seeks to provide a novel and useful  
ground working tool which is similar in some respects to a  
prickle chain but which can be constructed in a convenient  
manner. The invention also seeks to provide a tool  
element for such a ground working tool.

25       In one form the invention resides in an elongated ground  
working tool adapted to be supported at each end to rotate  
about the longitudinal axis thereof, said tool including a  
multitude of tool elements arranged in a plurality of  
groups in the longitudinal direction of the tool, each  
group of tool elements inter-engaging with the next



1 adjacent group to form flexible connections between the  
groups that will permit tensioning of the tool in the  
longitudinal direction when supported for rotation, said  
tool elements being adapted so that when the groups of  
5 tool elements are inter-engaged and the tool  
longitudinally tensioned, each group of tool elements  
presents a plurality of prongs spaced about and projecting  
outwardly with respect to the longitudinal axis of the  
tool.

10 Preferably, the prongs of one group of tool elements are  
spaced in the longitudinal direction of the tool from the  
prongs of the next adjacent group of tool elements.

15 Preferably, each tool element includes a portion extending  
generally in said longitudinal direction, one prong from  
each of two tool elements of one group extending through  
an opening or respective openings in said longitudinal  
portion of a tool element of the next adjacent group, each  
prong in each one group of tool elements extending through  
a respective longitudinal portion of a tool element of the  
20 next adjacent group of tool elements to provide the  
flexible connection between the groups of tool elements.

25 Preferably, each tool element comprises a loop portion and  
a pair of fingers projecting from the loop portion, the  
loop portion defining said longitudinal portion of the  
tool element and the fingers defining said prongs.

Preferably, there are two or three tool elements in each  
tool group.

30 Preferably, the loop portion of each tool element is  
substantially U-shaped having a pair of arms and a base  
bridging the arms.

1 Preferably, the arms of each loop occupy a common plane and the fingers extend in generally opposing directions to the same side of said plane.

5 Preferably, each finger is provided with an abutting portion adjacent the loop portion, the abutting portion being arranged to abut a similar portion of a finger of a further similar tool element in the same group of tool elements.

10 In another form, the invention resides in a tool element constructed as set forth in any one of the preceding paragraphs.

15 Each tool element may be formed from a length of metal which has been bent or otherwise deformed to form the loop portion and the two fingers. In another arrangement, the tool elements may be forged.

20 In still another form the invention resides in a ground working implement to be drawn or propelled over ground to be worked and including a rigid frame, an elongated ground working tool as defined in any one of the preceding paragraphs supported at each end by said frame for rotation about the longitudinal axis of the tool, said support being arranged so said longitudinal axis of the tool is inclined to the direction of movement of the frame over the ground when in use.

25 Preferably, the ground working implement is provided with means to adjust the tension of the tool when supported in the implement frame.

The invention will be better understood by reference to the following description of three specific embodiments

1 thereof as shown in the accompanying drawings in which:-

Fig. 1 is a schematic plan view of an agricultural implement fitted with two ground working tools according to the first embodiment;

5 Fig. 2 is a perspective view of a section of one of the ground working tools according to the first embodiments, the section comprising several tool groups;

10 Fig. 3 is a side view of a section of the tool shown in Fig. 2;

Fig. 4 is an end view the section of the tool shown in Fig. 2;

15 Fig. 5 is a perspective view of a tool element for the ground working tool according to the first embodiment;

Fig. 6 is an elevational view of the tool element of Fig. 5

Fig. 7 is a side view of the tool element of Fig. 5;

Fig. 8 is a plan view of the tool element of Fig. 5;

20 Fig. 9 is a fragmentary plan view illustrating the tool according to the first embodiment supported between support means which form part of a ground working implement;

Fig. 10 is an elevational view of Fig. 9;

25 Fig. 11 is an elevational view of a section of a tool according to a second embodiment;

Fig. 12 is an end view of the section of tool assembly shown in Fig. 11;

30 Fig. 13 is a view similar to Fig. 12 with the exception that only the tools in the endmost group are illustrated;

Fig. 14 is an elevational view of a tool element for the tool of Fig. 11;

Fig. 15 is a side view of the tool element of Fig. 11; and

35

A

1            Fig. 16 is a plan view of the tool element of Fig.  
11.

5            Referring to Fig. 1 of the drawings, there is shown a  
ground working implement 11 fitted with two elongated  
ground working tools 12 according to the first embodiment.  
The ground working implement 11 includes a mobile frame 13  
which is supported on ground wheels 14 and which is  
adapted to be drawn by a tractor or other towing vehicle  
(not shown). The mobile frame 13 includes a pair of  
10          support beams 15 each of which is inclined to the  
direction of travel of the implement. At the ends of each  
beam 15 there are rearwardly extending each of which  
carries a support means 18. Each ground working tool 12  
is supported at its ends by the support means 18 on a  
15          respective one of the beams 15 for rotation about the  
longitudinal axis of the tool.

20          Each ground working tool comprises a plurality of tool  
elements 21 arranged in a series of groups 23, there being  
two tool elements in each group in this embodiment. Each  
group of tool elements inter-engages with the next  
adjacent group to form flexible connections between the  
groups that will permit tensioning of the tool in the  
longitudinal direction when supported for rotation by the  
frame 13.

25          Each tool element 21 comprises a loop portion 25 and a  
pair of fingers 27 when the groups of tool elements are  
inter-engaged and the tool longitudinally tensioned the  
fingers 27 define prongs which are spaced about and  
project outwardly with respect to the longitudinal axis of  
30          the tool.



1 The loop portion 25 of each tool element is substantially  
U-shaped having two spaced arms 29 and a base 31 which  
bridges the arms. The fingers 27 extend one from the free  
end of each arm 29 of the loop portion. The two arms 29 of  
5 each loop portion occupy a common plane and the fingers 27  
deviate from that plane to one side thereof. Each finger  
27 includes an abutting portion 35 at the inner end  
thereof. The abutting portion 35 is arranged to butt  
against a corresponding abutting portion of a similar tool  
10 in the same group of tools, as will become evident later.

Conveniently, each tool element is formed from a length of  
metal rods which has been bent or otherwise deformed to  
form the loop portion and the two fingers. Of course,  
each tool element may be formed by any other suitable  
15 means, such as forging.

As mentioned hereinbefore, the tool elements are connected  
together in a series of groups, with each group having two  
tool elements. In this way, each group provides four  
projecting prongs. The two tool elements of each group  
20 are positioned with their abutting portions 35 in contact,  
as best seen in Figs. 3 and 4. This has the effect of  
locating the fingers 29 in pairs 36, one finger of each  
pair being from each tool element in the group. Apart  
from at the tool group at one end of the tool, the loop  
25 portion 25 of each tool element 21 receives one pair of  
fingers from a neighbouring tool group, with the fingers  
being held captive between the arms of the loop and the  
base. The arrangement is such that the inner ends of the  
fingers are received in the loop portion, the fingers  
30 being inserted into the loop portion through the open end  
of the U.



1 Tensioning of the ground working tool 12 in the  
longitudinal direction ensures that the tool elements  
remain connected together. The tool elements of each  
group are held in position by virtue of their connection  
5 with the two neighbouring groups. More specifically, the  
finger pairs of the two tools in any group are held in  
position by the loop portions of tools in one neighbouring  
tool group and the loop portions of the tools in the  
first-mentioned tool group are held in position by the  
10 fingers of the other neighbouring group.

The tool 12 is constructed from the tool elements 21  
merely by connecting the tool elements together in the  
manner described hereinbefore.

15 As stated previously, each tool 12 is mounted at its ends  
on support means 18 for rotation about the longitudinal  
axis of the tool. Referring now to Figs. 9 and 10 of the  
accompanying drawings, each support means 18 includes a  
shaft 41 rotatably supported adjacent one end in a bearing  
(not shown) enclosed within a housing 43. The housing 43  
20 is mounted on the implement frame 13 and the shaft extends  
from the housing in cantilever fashion. The respective  
end of the tool 12 is detachably connected to the free end  
of the shaft by way of a coupling means 45, 46 which  
includes a universal joint 47. The universal joint  
25 accommodates angular misalignment between the longitudinal  
axis of the tool 12 and the axis of rotation of the shaft  
41.

30 As the tool group at one end of the tool 12 has the loop  
portions of the two tool elements endmost and the tool  
group at the other end of the tool has fingers endmost,  
the coupling means 45 and 46 differ in construction. The  
coupling means 45 includes a clamping means 49 which

- 1 clampingly engage the fingers of the tool elements at the  
respective end of the tool . The clamping means 49  
comprises a clamping plate 51 and a pair of U-bolts 53  
between which the fingers are clamped. The coupling means  
5 46 includes a transverse pin 55 supported by a yoke 57.  
The pin 55 is located in the loop portions of the tool  
elements at the respective end of the tool thereby to  
effect attachment of the loop portions to the coupling  
means.
- 10 Means are provided for selectively varying the spacing  
between the support means 18 to adjust the tension of the  
ground working tool when supported in the frame of the  
ground working implement. In this embodiment such means  
include a slide mechanism which supports one of the  
15 support means 18 for selective movement towards and away  
from the other support means. In an alternative  
arrangement, the spacing between the support means 18 can  
be varied by variation of the effective length of the  
support beam.
- 20 In use, each ground working tool 12 is mounted on the  
mobile frame 13 with the tool assembly at ground level.  
As the mobile frame traverses the grounds, the tool 12 is  
dragged in a generally sideways direction over the ground  
surface and this causes the tool to rotate. The rotating  
25 action of the tool causes the prongs to work the ground.  
The flexible nature of the interconnection between the  
respective groups of tool elements allows the tool to work  
uneven ground and also serves to relieve stresses in the  
tool.
- 30 Referring now to Figs. 11 to 16 of the drawings, the tool  
according to the second embodiment is similar to that of  
the first embodiment with an exception that each tool

1 group consists of three tools instead of two tools.  
Because of the similarity between the two embodiments,  
like reference numerals are used to identify like parts.  
Likewise, because of the similarity between the two  
5 embodiments, it will not be necessary to describe the  
third embodiment in full. A distinguishing feature  
between the tool elements of the first embodiment and the  
tool elements of the second embodiment is the inclination  
of the abutting portions 35 relative to the plane of the  
10 arms of the loop portion of each tool element. It will be  
appreciated that the abutting portions have to be suitably  
angled to accommodate a group of three tools rather than a  
group of two tools. A further distinguishing feature is  
that each arm 29 of the loop portion has a bent portion 30  
15 adjacent the base 31. The bent portions 30 of the two  
arms serve to offset the base 31 from the plane of the two  
arms. This feature ensures that the respective base  
portions 31 of the tool elements in each group do not  
interfere with each other which the tool elements are in  
20 position in the group.

While the frame 13 illustrated in Fig. 1 of the drawings  
is suitable for supporting an elongated ground working  
tool according to the invention, an alternative frame  
construction has been devised which is particularly,  
25 although not solely, for such a purpose.

It should be appreciated that the scope of the invention  
is not limited to the scope of the embodiments described.  
For instance, a tool assembly according to the embodiment



1305628

- 11 -

1        may be formed with groups of tools with more than three  
         tools in each group if desired.

A

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. An elongated ground working tool adapted to be supported at each end to rotate about the longitudinal axis thereof, said tool including a multitude of tool elements arranged in a plurality of groups in the longitudinal direction of the tool, each group of tool elements inter-engaging with the next adjacent group to form flexible connections between the groups that will permit tensioning of the tool in the longitudinal direction when supported for rotation, each group of tool elements presents a plurality of prongs spaced about and projecting outwardly with respect to the longitudinal axis of the tool, characterised in that each tool element includes a loop shaped portion extending generally in said longitudinal direction and defining an opening, one prong from each of two tool elements of one group extending through said opening in said longitudinal portion of a tool element of the next adjacent group to provide the flexible connection between the groups of tool elements.
2. An elongated ground working tool as claimed in claim 1 wherein the prongs of one group of tool elements are spaced in the longitudinal direction of the tool from the prongs of the next adjacent group of tool elements.
3. An elongated ground working tool according to claim 1 or 2 wherein each tool element further includes a pair of fingers projecting from the loop portion, said fingers defining said prongs.
4. An elongated ground working tool according to claim 3 wherein the loop portion of each tool element is

substantially U-shaped having a pair of arms and a base bridging the arms.

5. An elongated ground working tool according to claim 4 wherein one finger extends from the free end of each arm of the U-shaped loop portion.

6. An elongated ground working tool according to claim 4 wherein the arms of each loop occupy a common plane and the fingers extend in generally opposing directions to the same side of said plane.

7. An elongated ground working tool according to claim 5 wherein the arms of each loop occupy a common plane and the fingers extend in generally opposing directions to the same side of said plane.

8. An elongated working tool according to claim 4, 5, 6 or 7 wherein each loop portion receives its respective fingers at the region thereof adjacent the inner end of the fingers.

9. An elongated ground working tool according to claim 4, 5, 6 or 7 wherein each finger is provided with an abutting portion adjacent the loop portion, the abutting portion being arranged to abut a similar portion of a finger

DE

of a further similar tool element in the same group of tool elements.

10. An elongated ground working tool formed of a plurality of tool elements interlocked in a series of groups to form a chain like structure the ends of which are intended to be connected to a support in such a way as to enable the chain like structure to rotate, each group comprising at least two tool elements and each tool element comprising a loop portion and a pair of fingers projecting from the loop portion.

11. A tool according to claim 10 wherein the loop portions of the tool elements in those groups which in the longitudinal direction of the chain like structure have a neighbouring group on the loop side, each receive two fingers one from each of two tool elements in a neighbouring tool group to retain the series of tool groups together.

12. A tool element comprising a substantially U-shaped loop portion having a pair of arms and a base bridging the arms, and a pair of fingers each extending from the free end of a respective one of the arms of the loop portion, wherein the arms of each loop portion occupy a common plane and the fingers extend in generally opposing directions to the same side of said plane.



13. A tool element according to claim 12 wherein each finger is provided with an abutting portion adjacent the loop portion.

14. A ground working implement to be drawn or propelled over ground to be worked and including a rigid frame, an elongated ground working tool as claimed in any one of claims 1, 2, 4, 5, 6, 7, 10 or 11 supported at each end by said frame for rotation about the longitudinal axis of the tool, said support being arranged so said longitudinal axis of the tool is inclined to the direction of movement of the frame over the ground when in use.

15. A ground working implement to be drawn or propelled over ground to be worked and including a rigid frame, an elongated ground working tool as claimed in claim 3 supported at each end by said frame for rotation about the longitudinal axis of the tool, said support being arranged so said longitudinal axis of the tool is inclined to the direction of movement of the frame over the ground when in use.

16. A ground working implement to be drawn or propelled over ground to be worked and including a rigid frame, an elongated ground working tool as claimed in claim 8 supported at each end by said frame for rotation about the

D

15

longitudinal axis of the tool, said support being arranged so said longitudinal axis of the tool is inclined to the direction of movement of the frame over the ground when in use.

17. A ground working implement to be drawn or propelled over ground to be worked and including a rigid frame, an elongated ground working tool as claimed in claim 9 supported at each end by said frame for rotation about the longitudinal axis of the tool, said support being arranged so said longitudinal axis of the tool is inclined to the direction of movement of the frame over the ground when in use.

18. A ground working implement as claimed in claim 14 wherein means are provided to adjust the tension of the tool when supported in the implement frame.

19. A ground working implement as claimed in any one of claims 15 to 17 wherein means are provided to adjust the tension of the tool when supported in the implement frame.




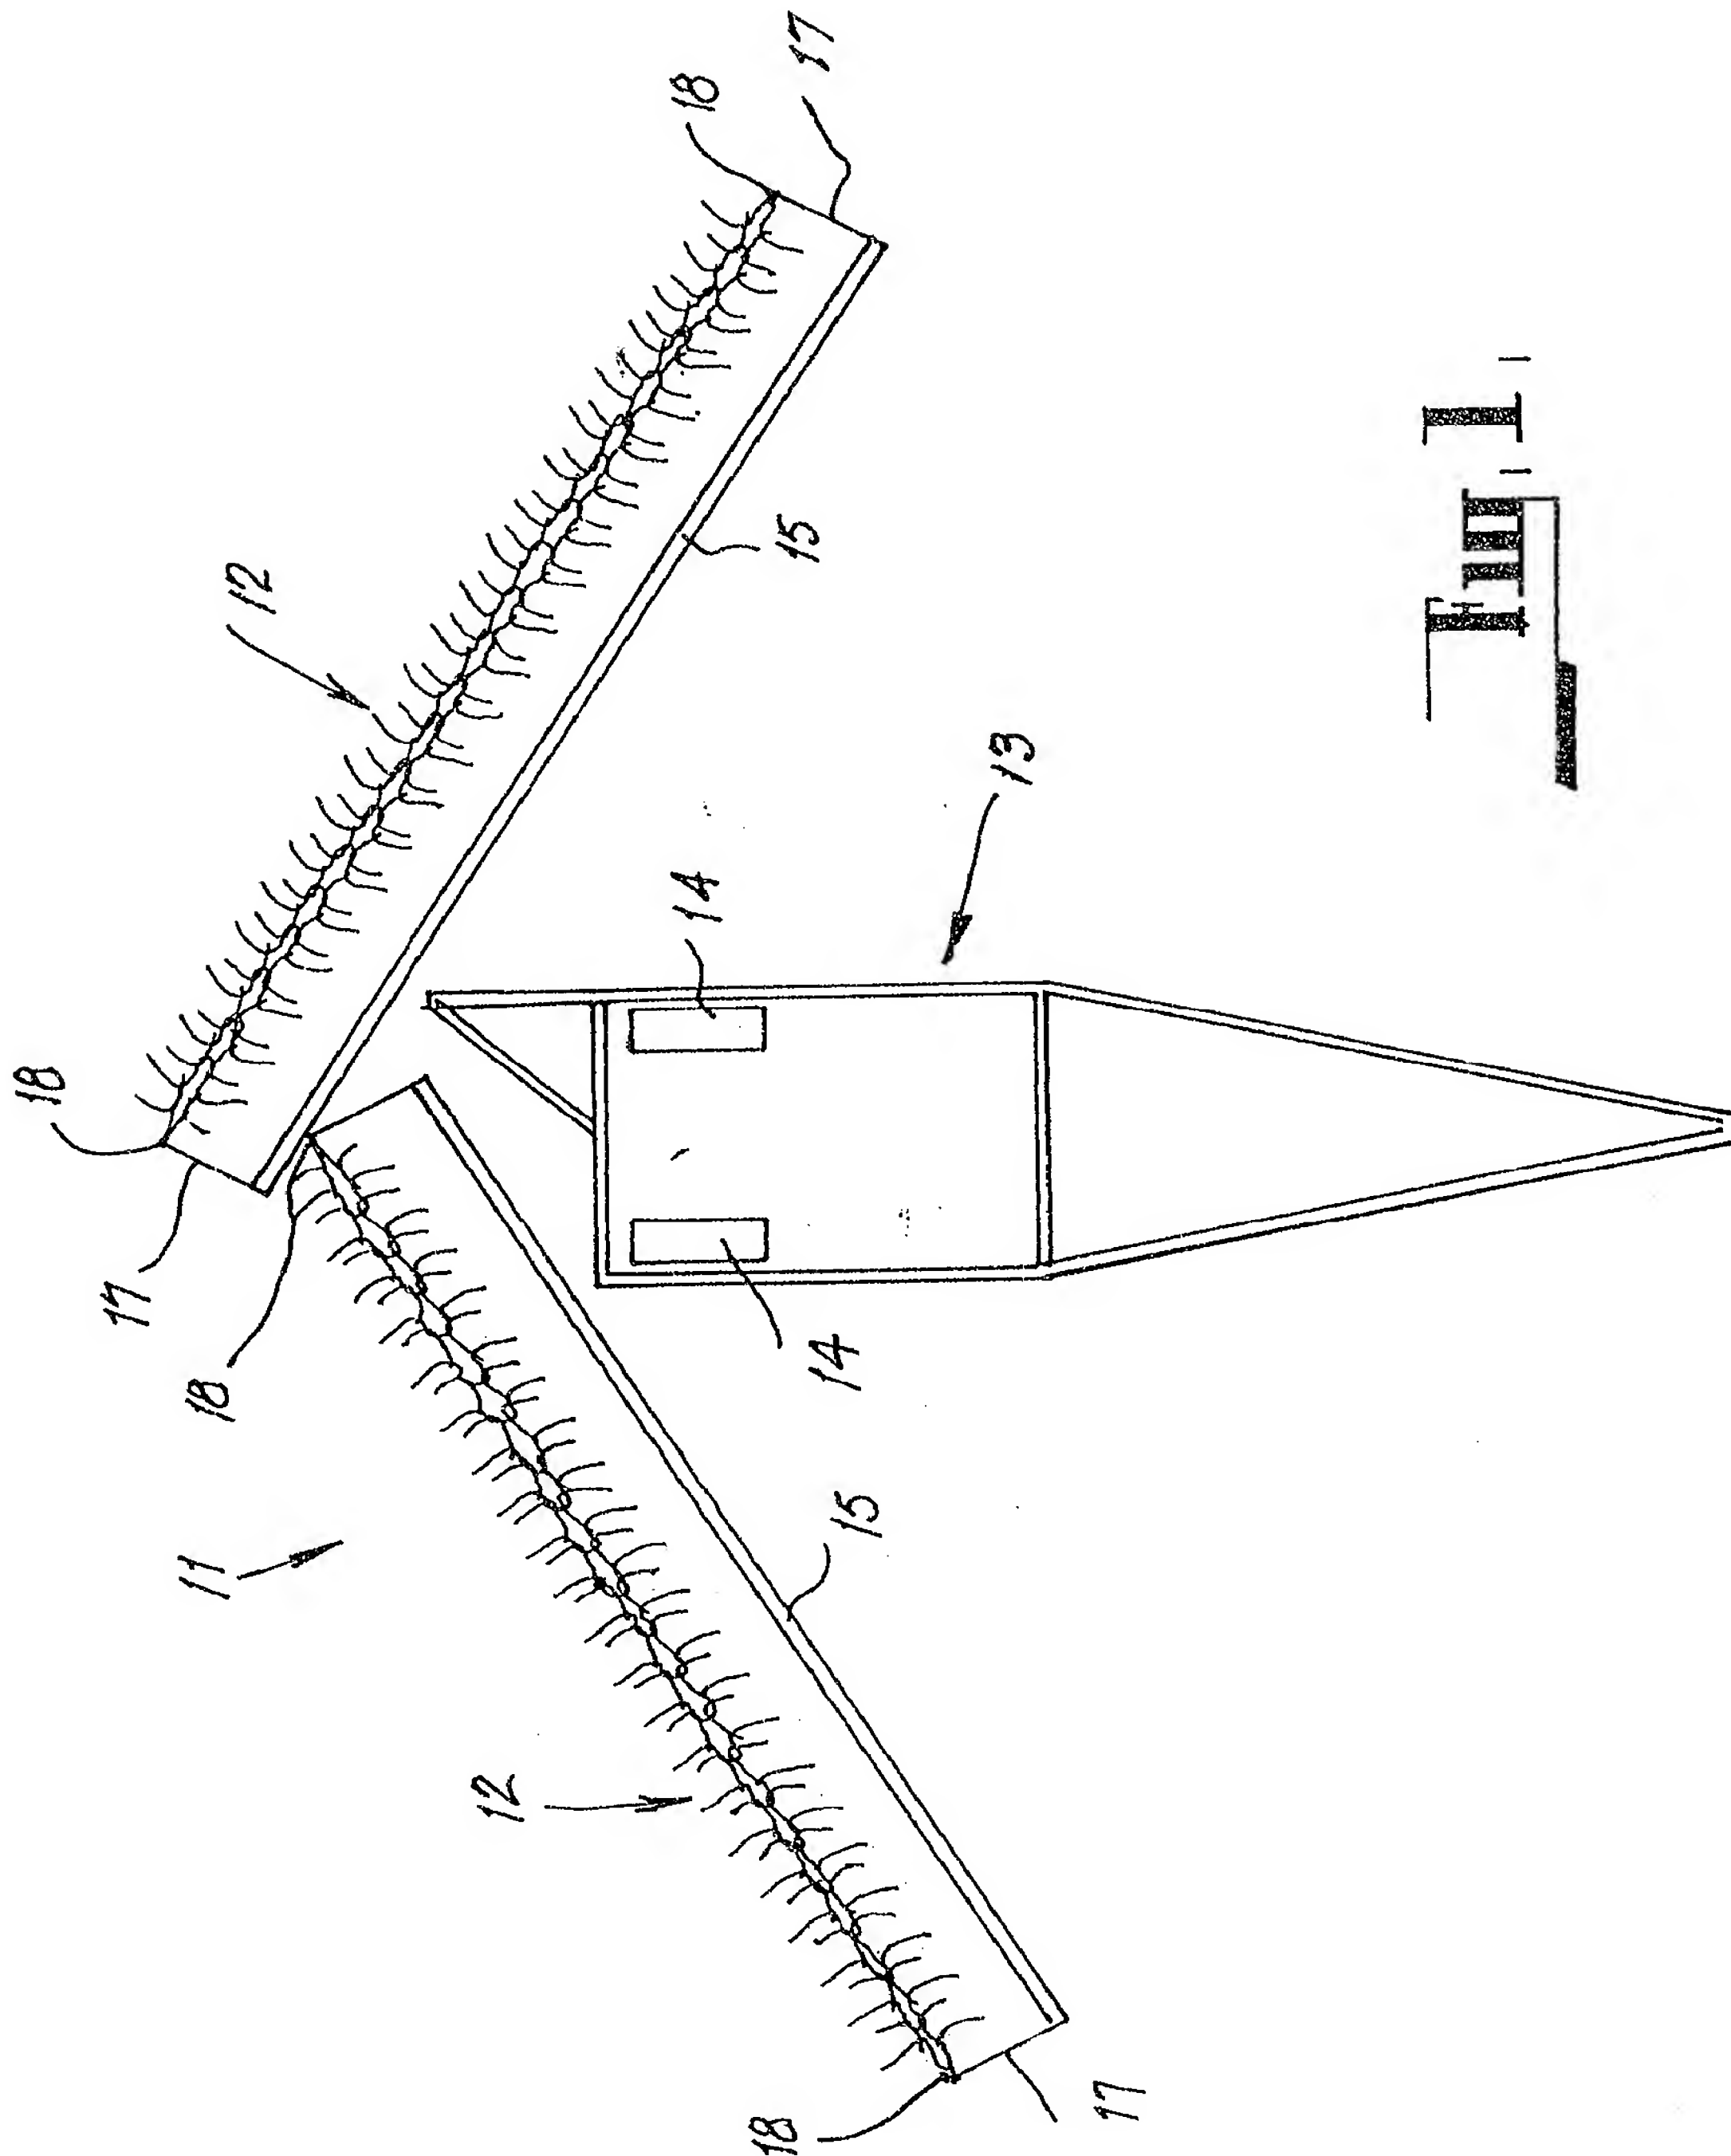



Fig. 1




*P. C. M. Rogers & Co.*

A



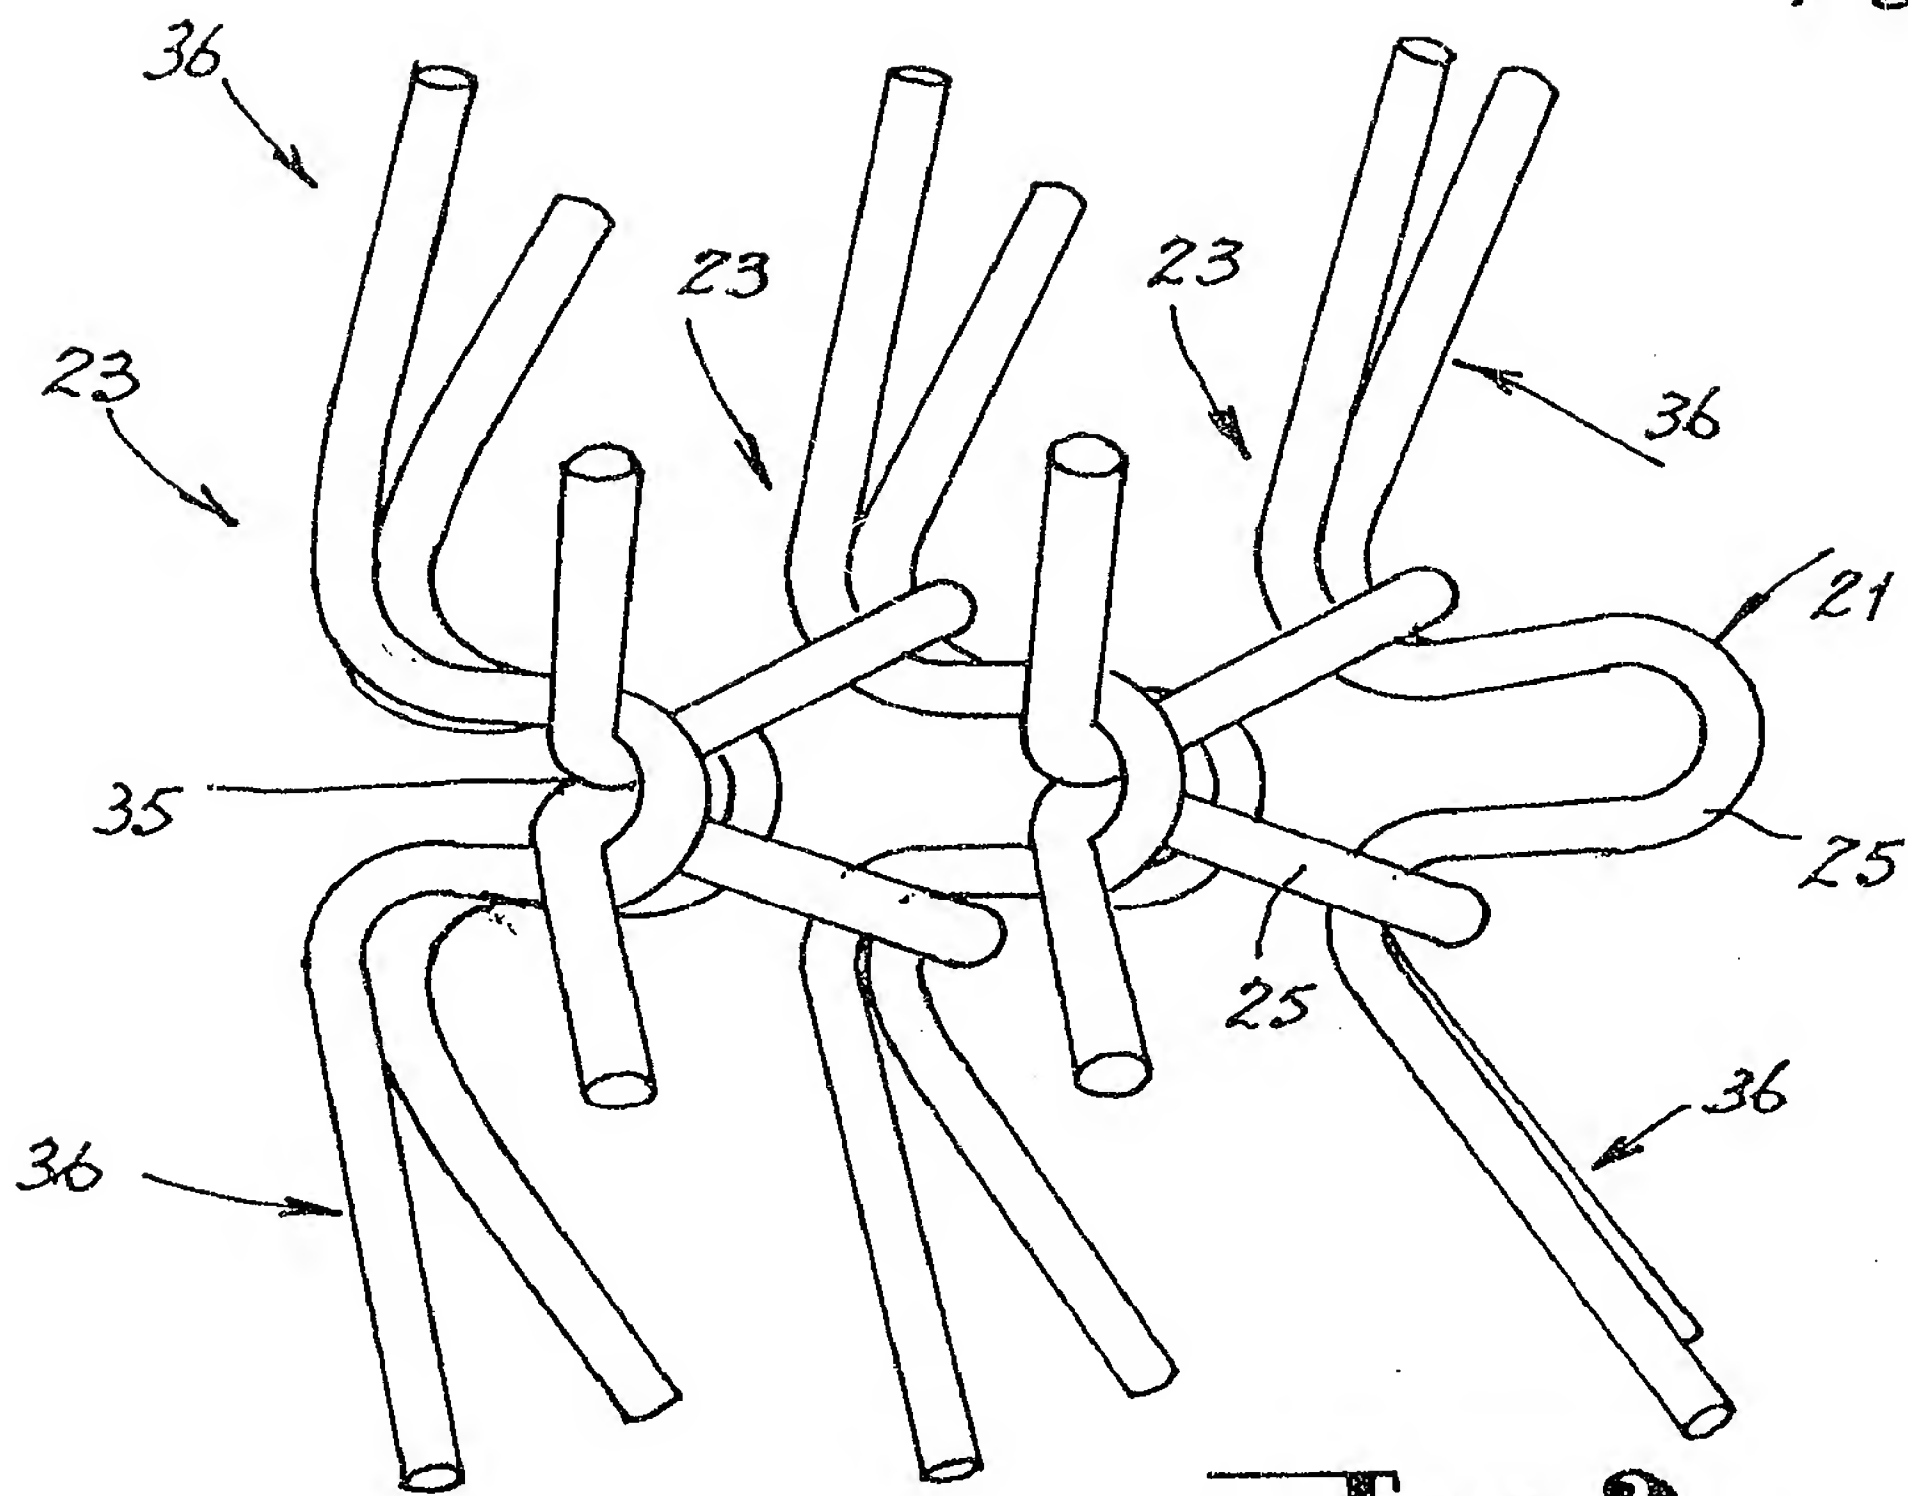


**Fig. 3,**

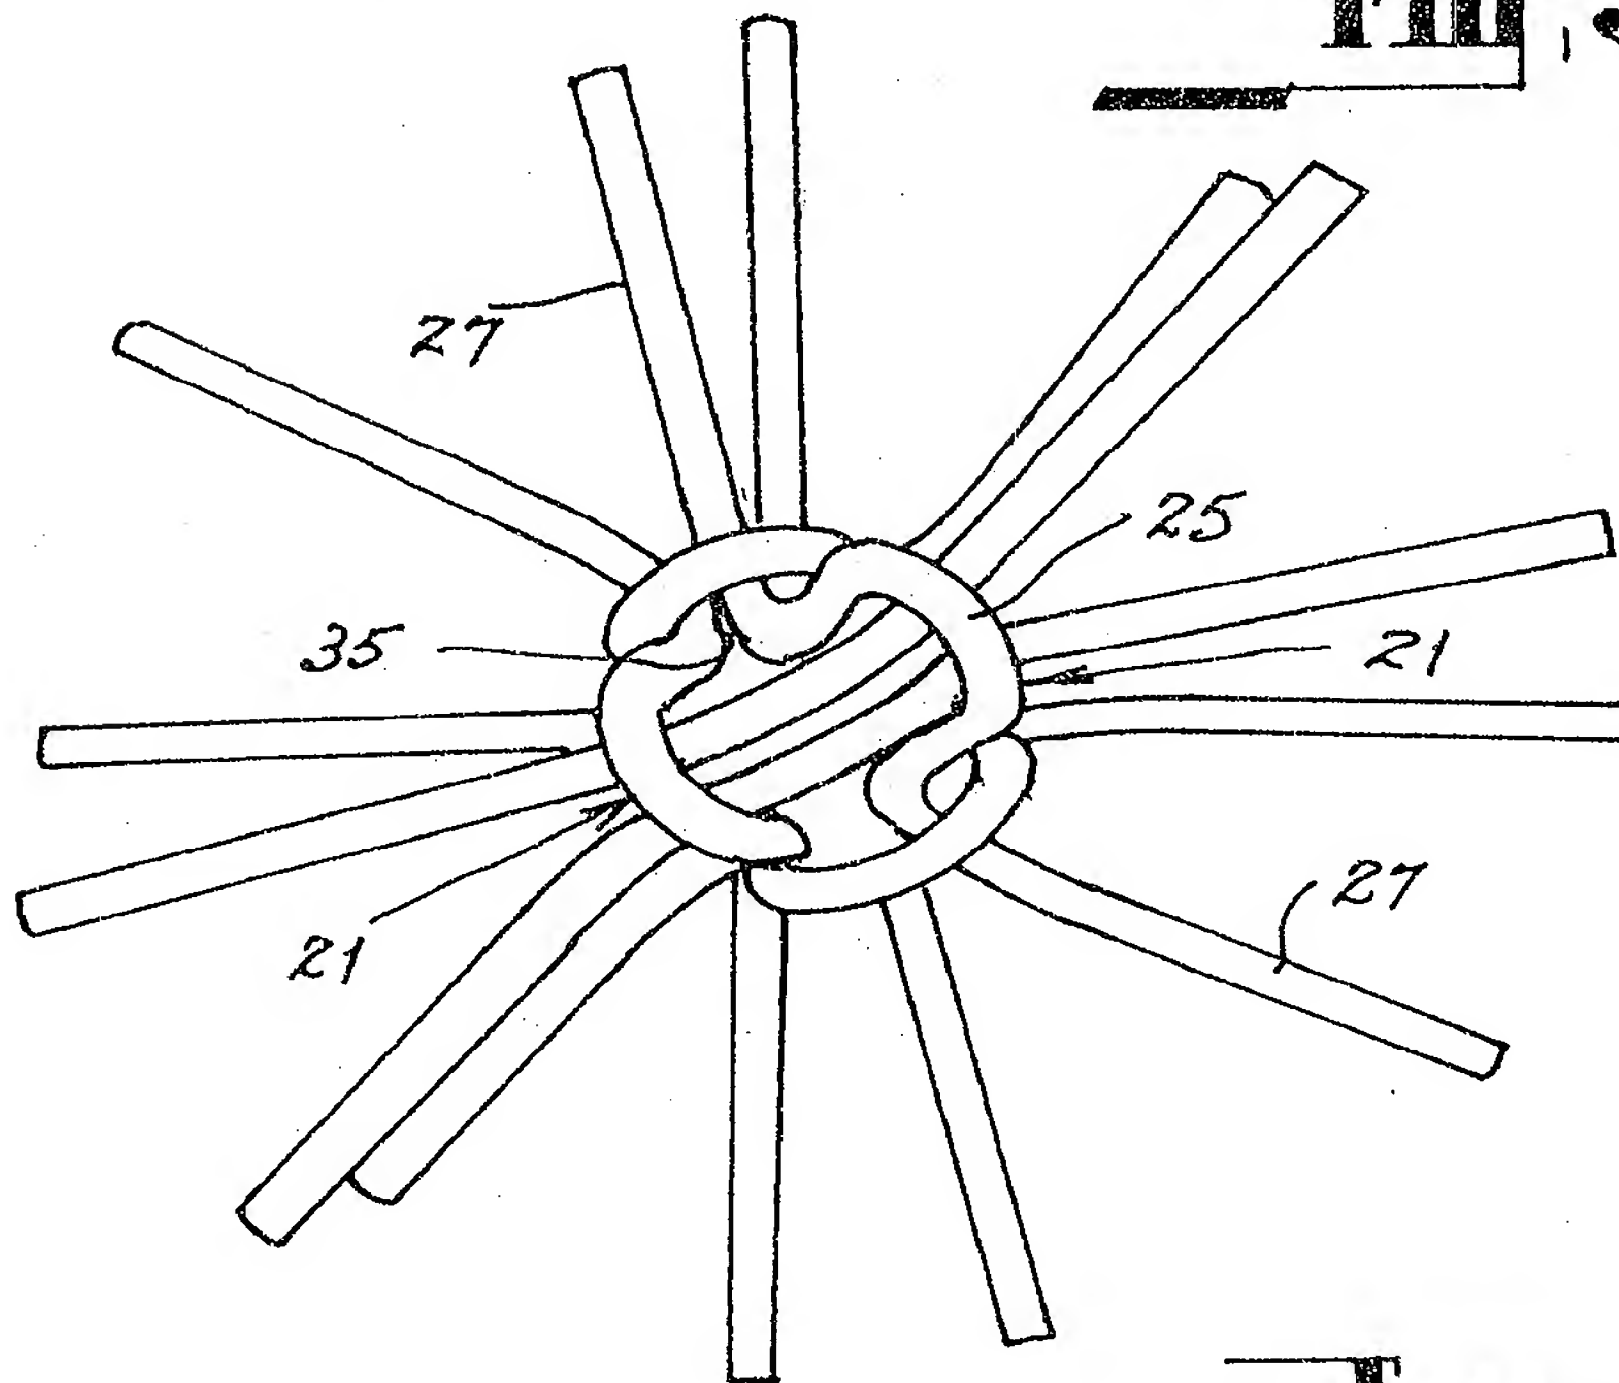

**Fig. 4,**

*John McLaughlin & Co.*

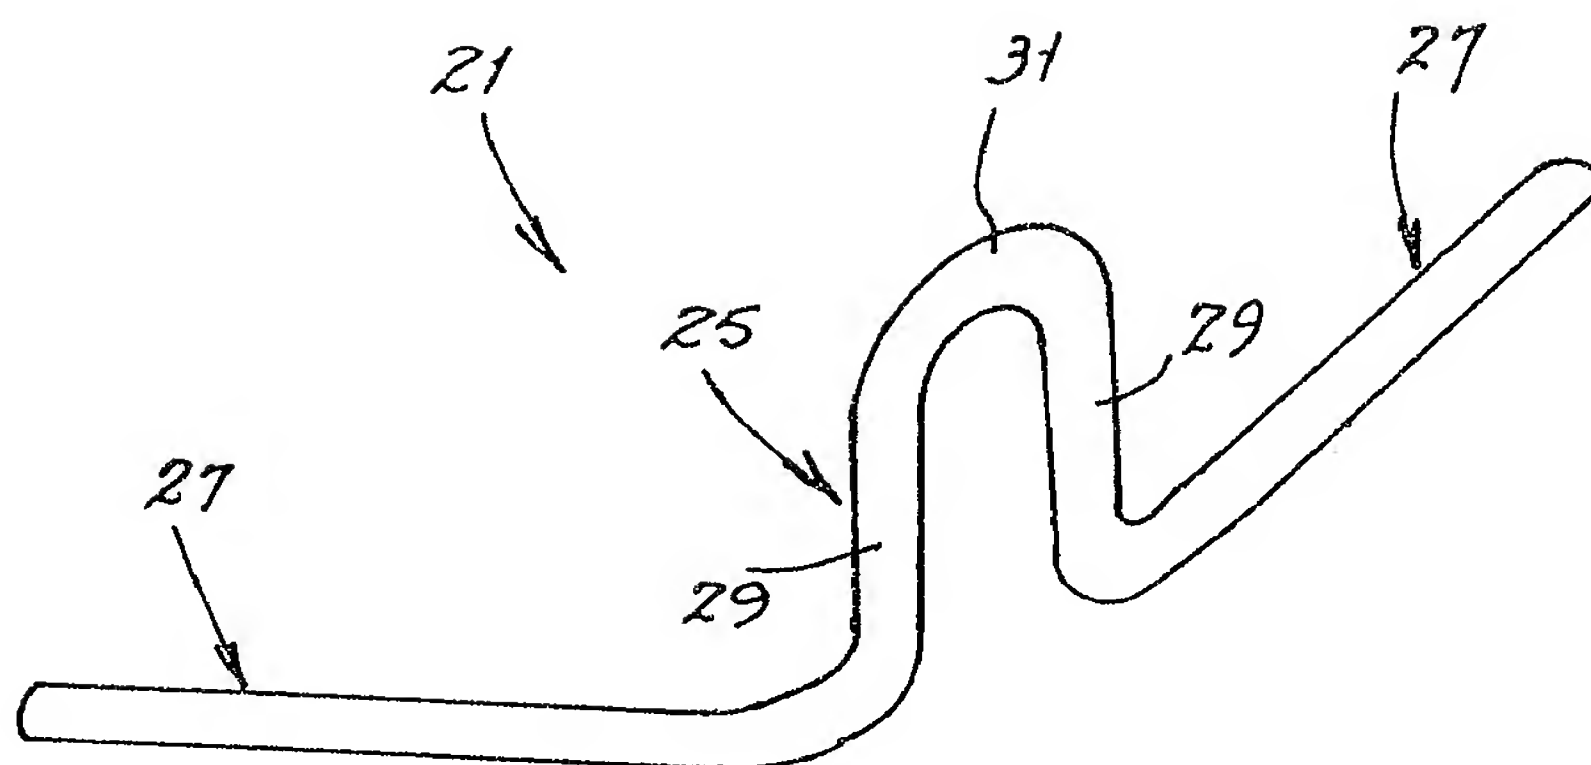

**Fin. 5.**

Wm. H. Miller, Secy.

A

A

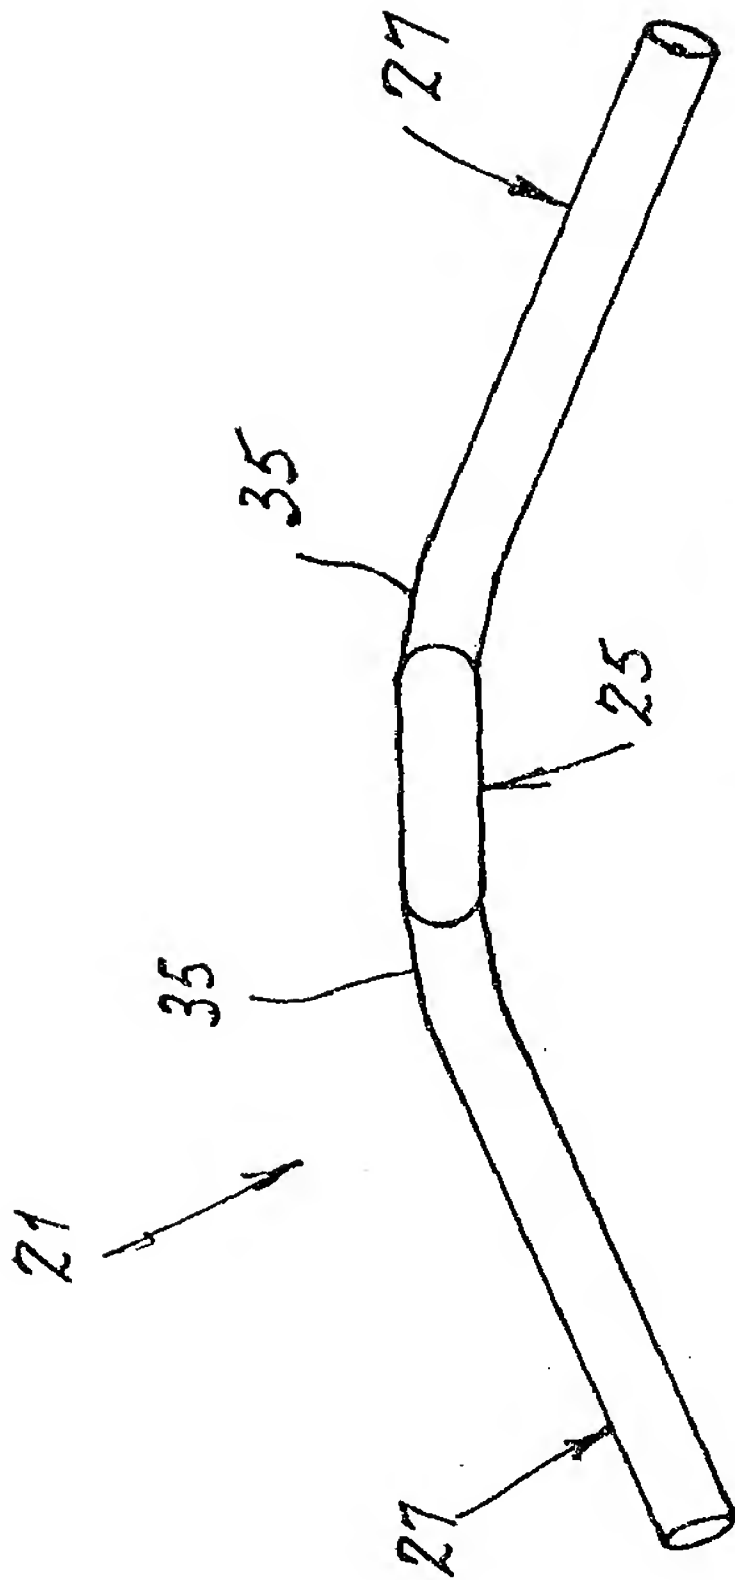


Fig. 8

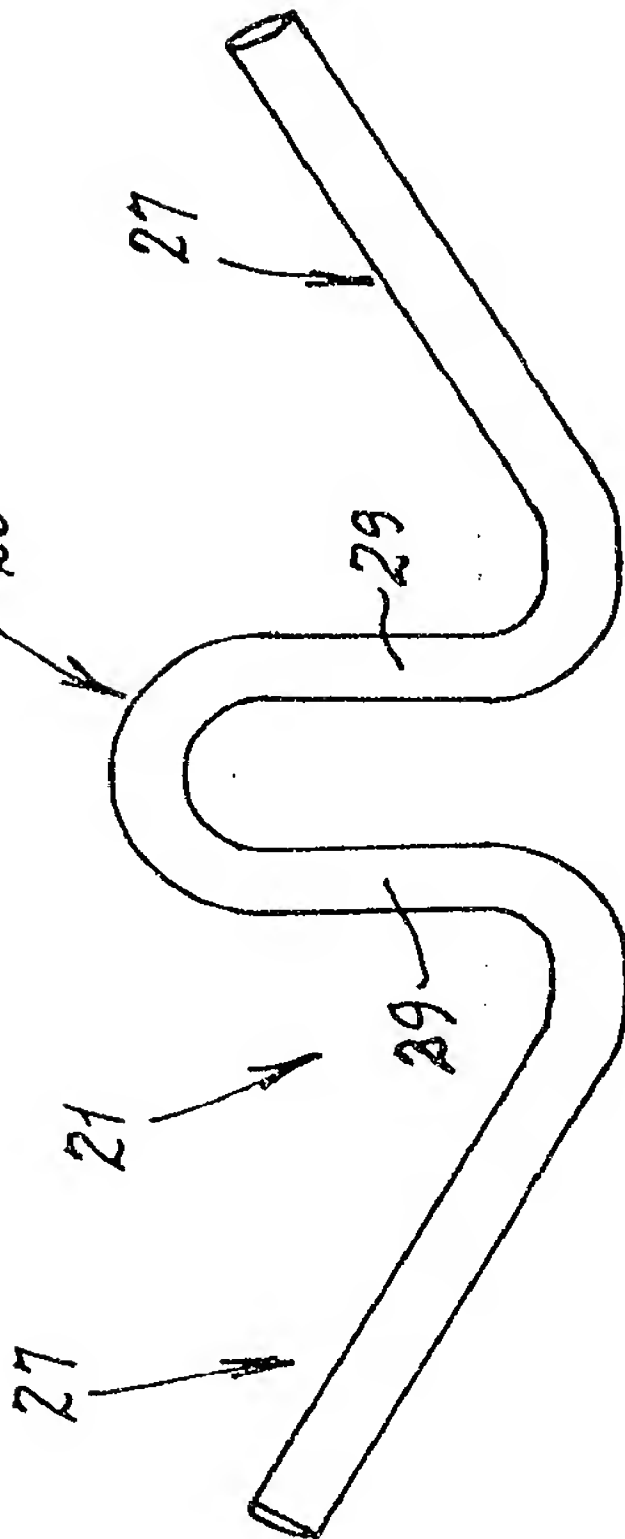


Fig. 6

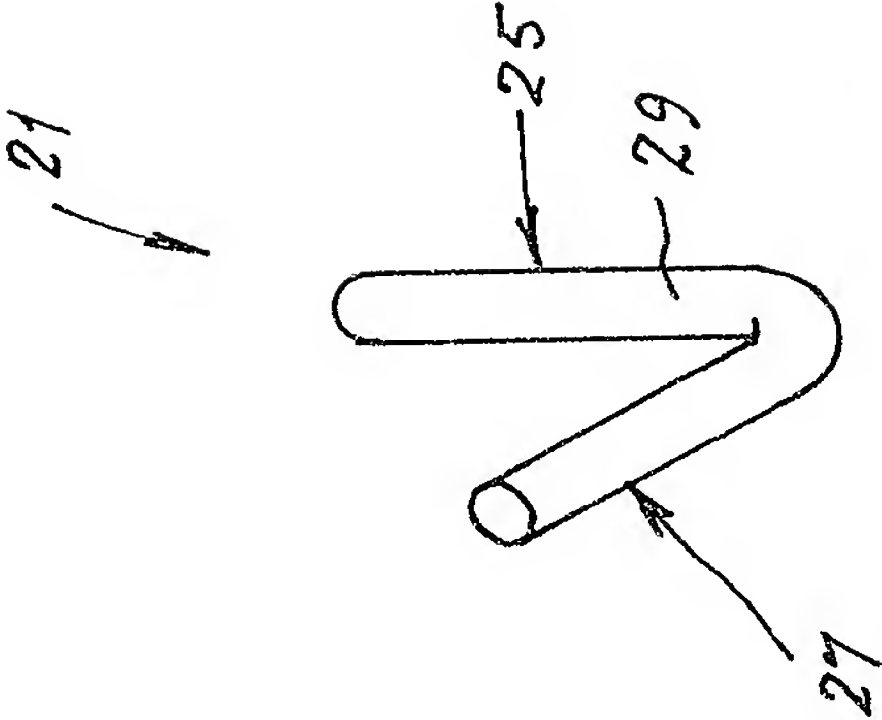


Fig. 7

*W. L. McLaughlin*



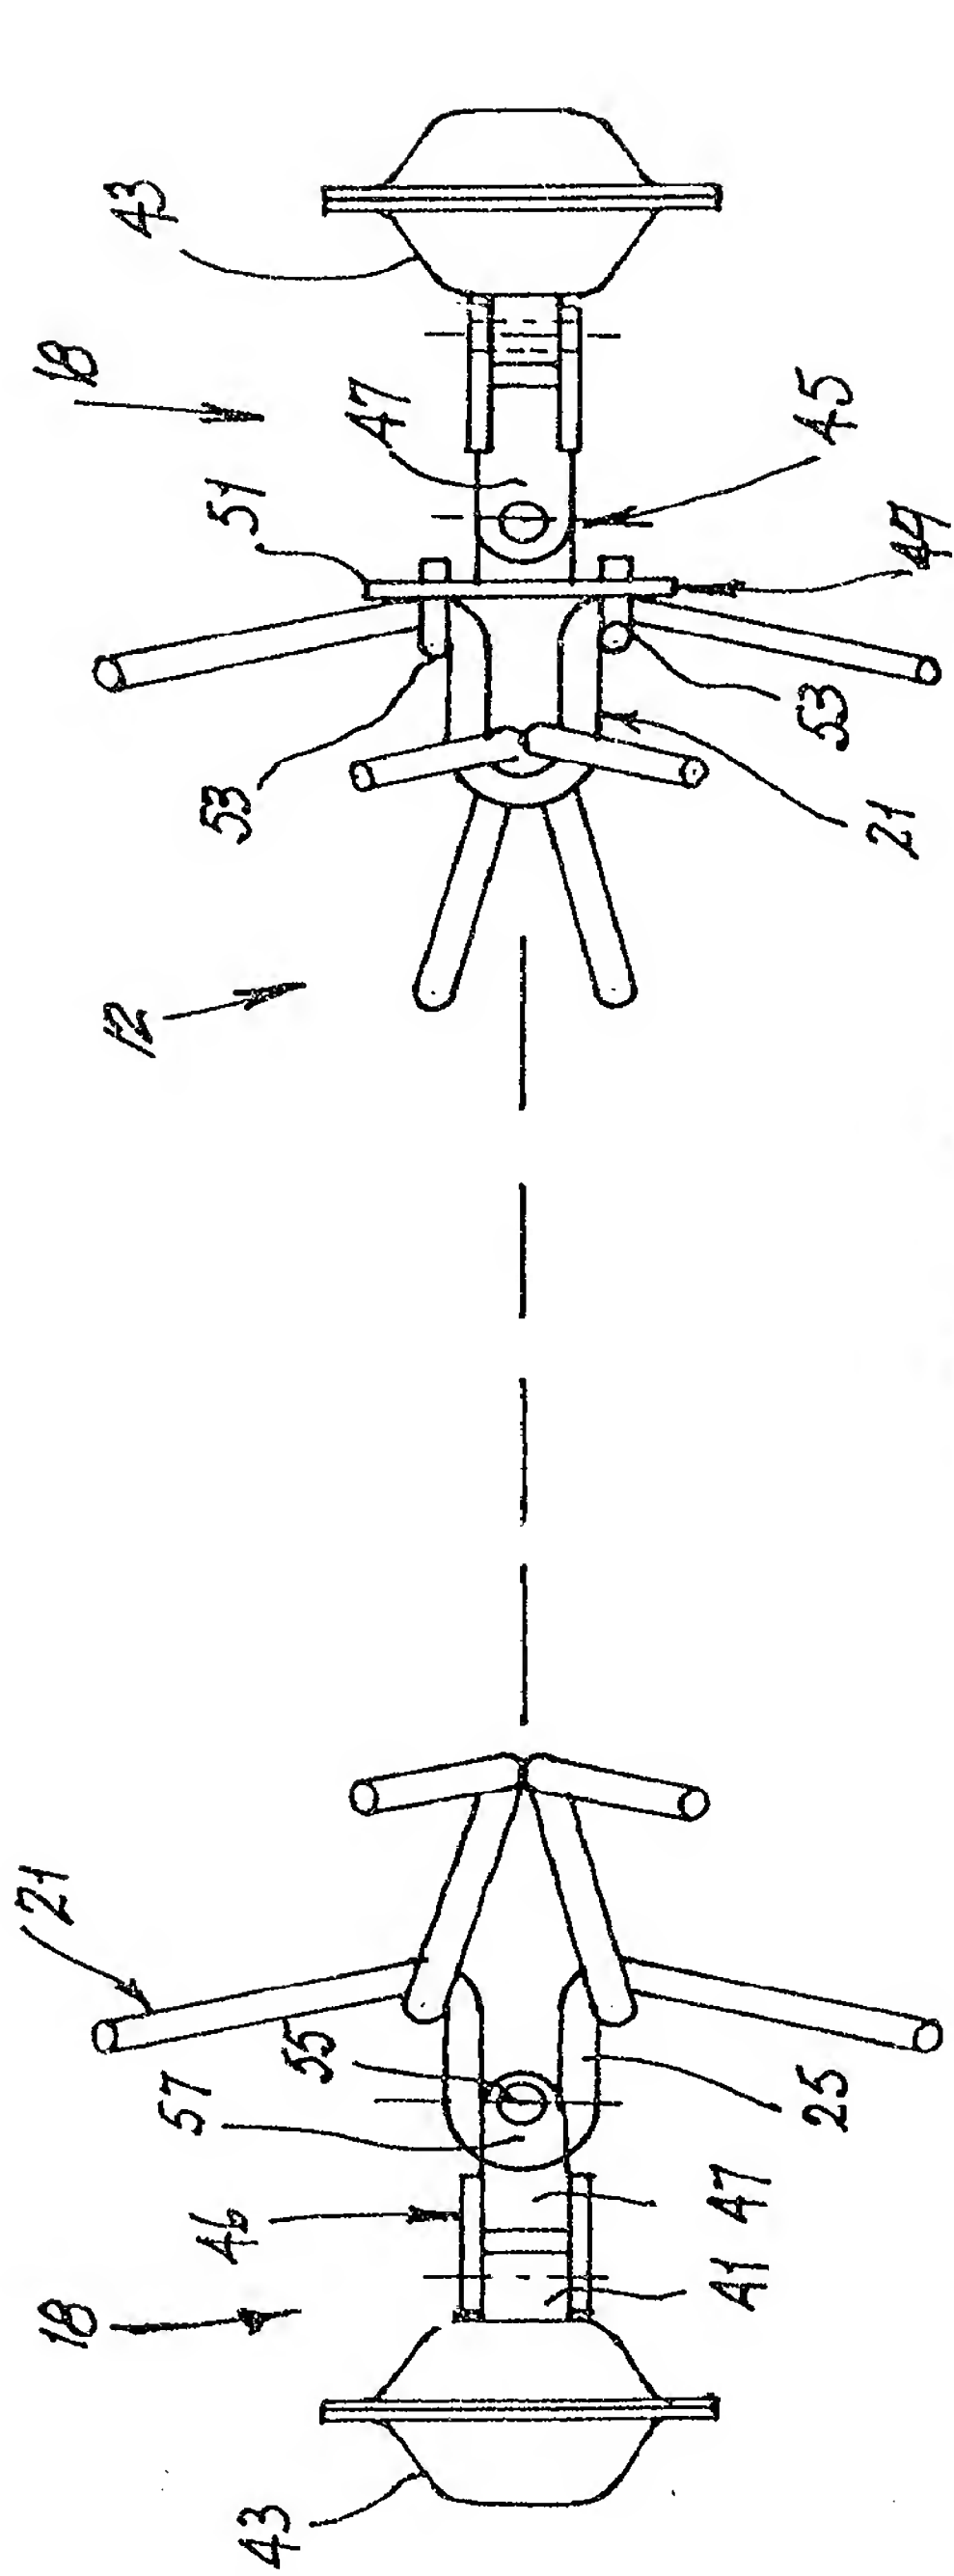


Fig. 9



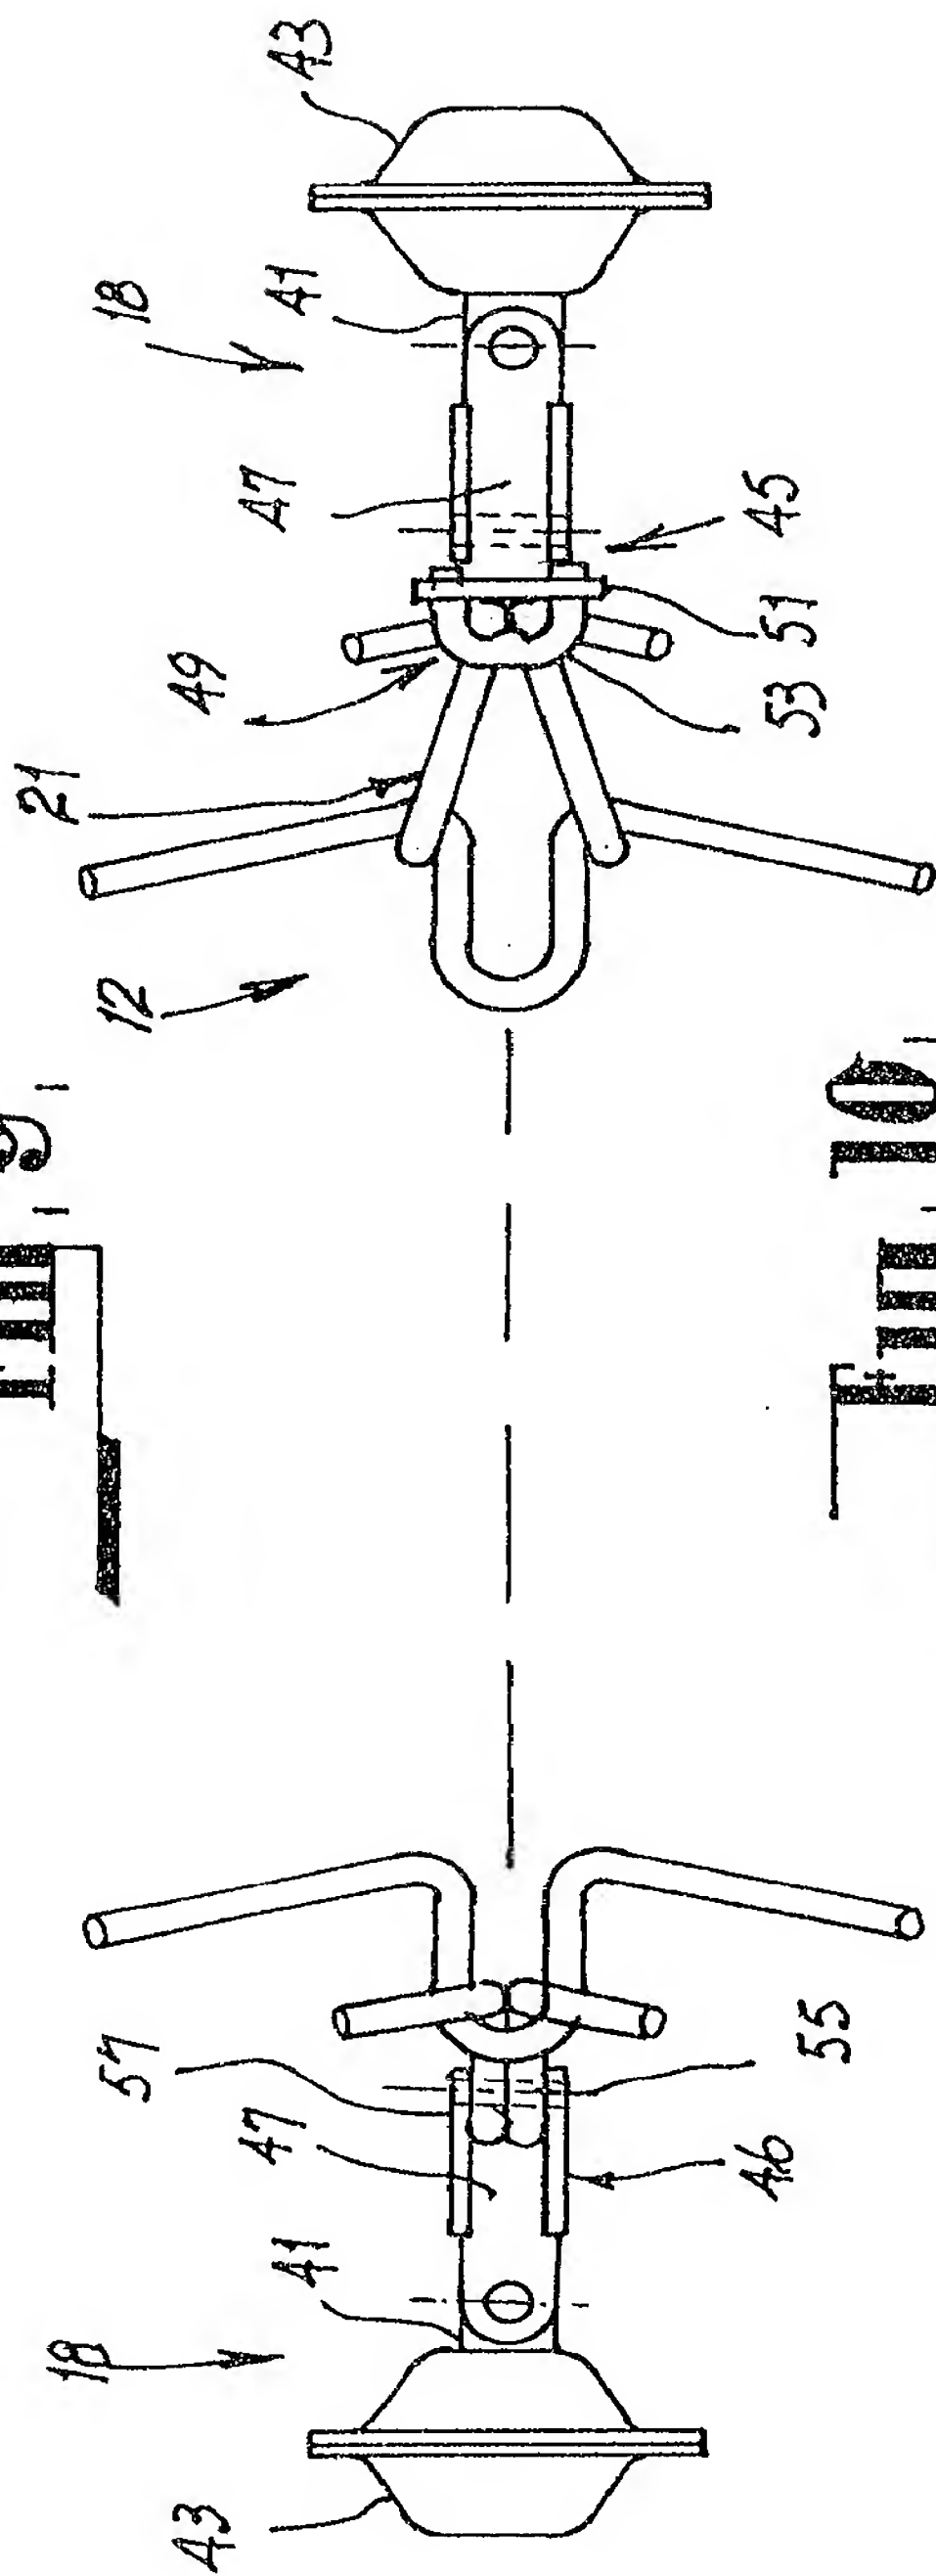


Fig. 10

*Wm. H. Hayes & Son*

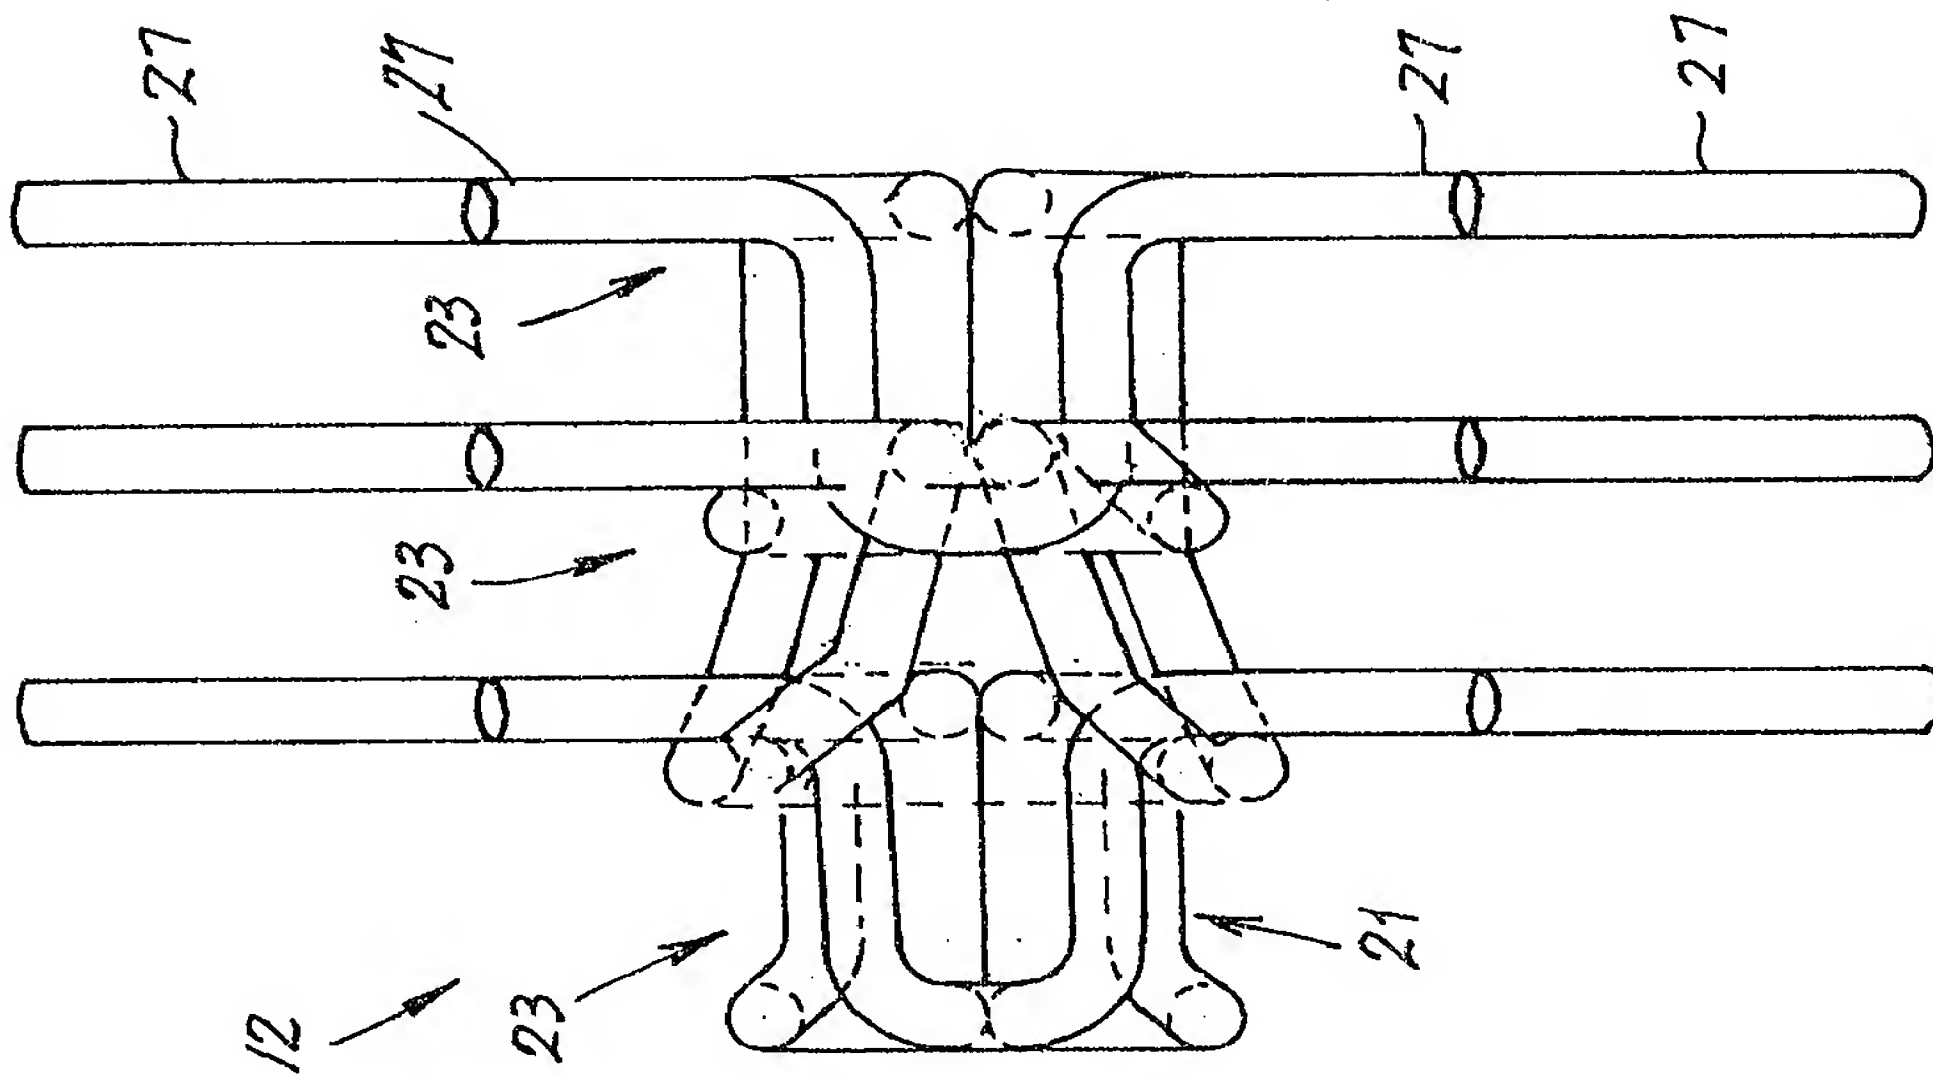

# II

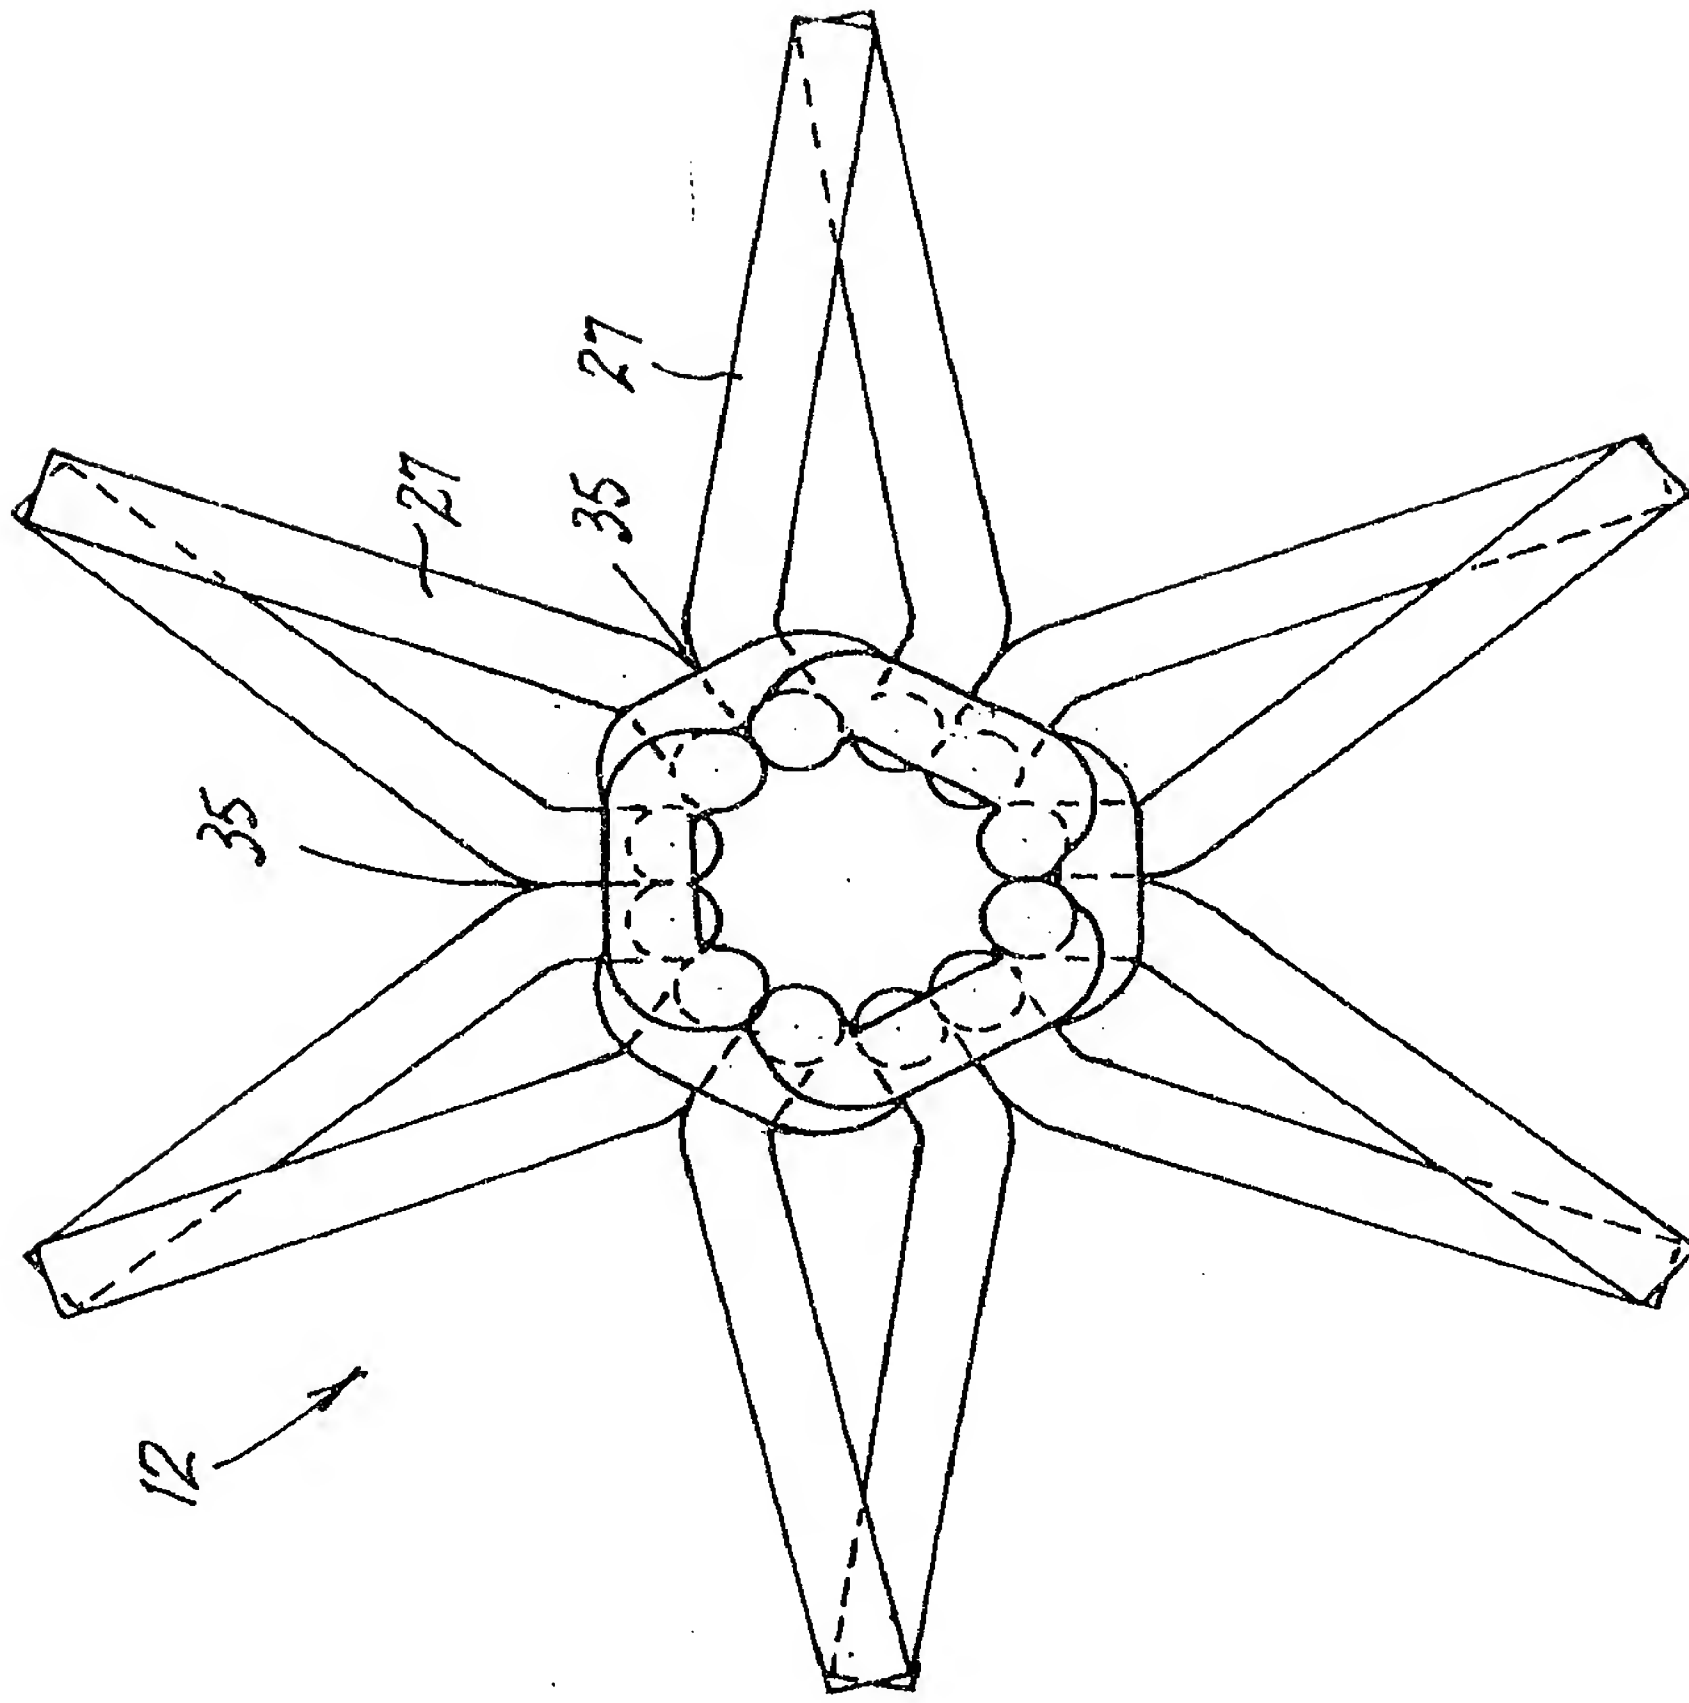

21

A

John H. Rogers & Howard

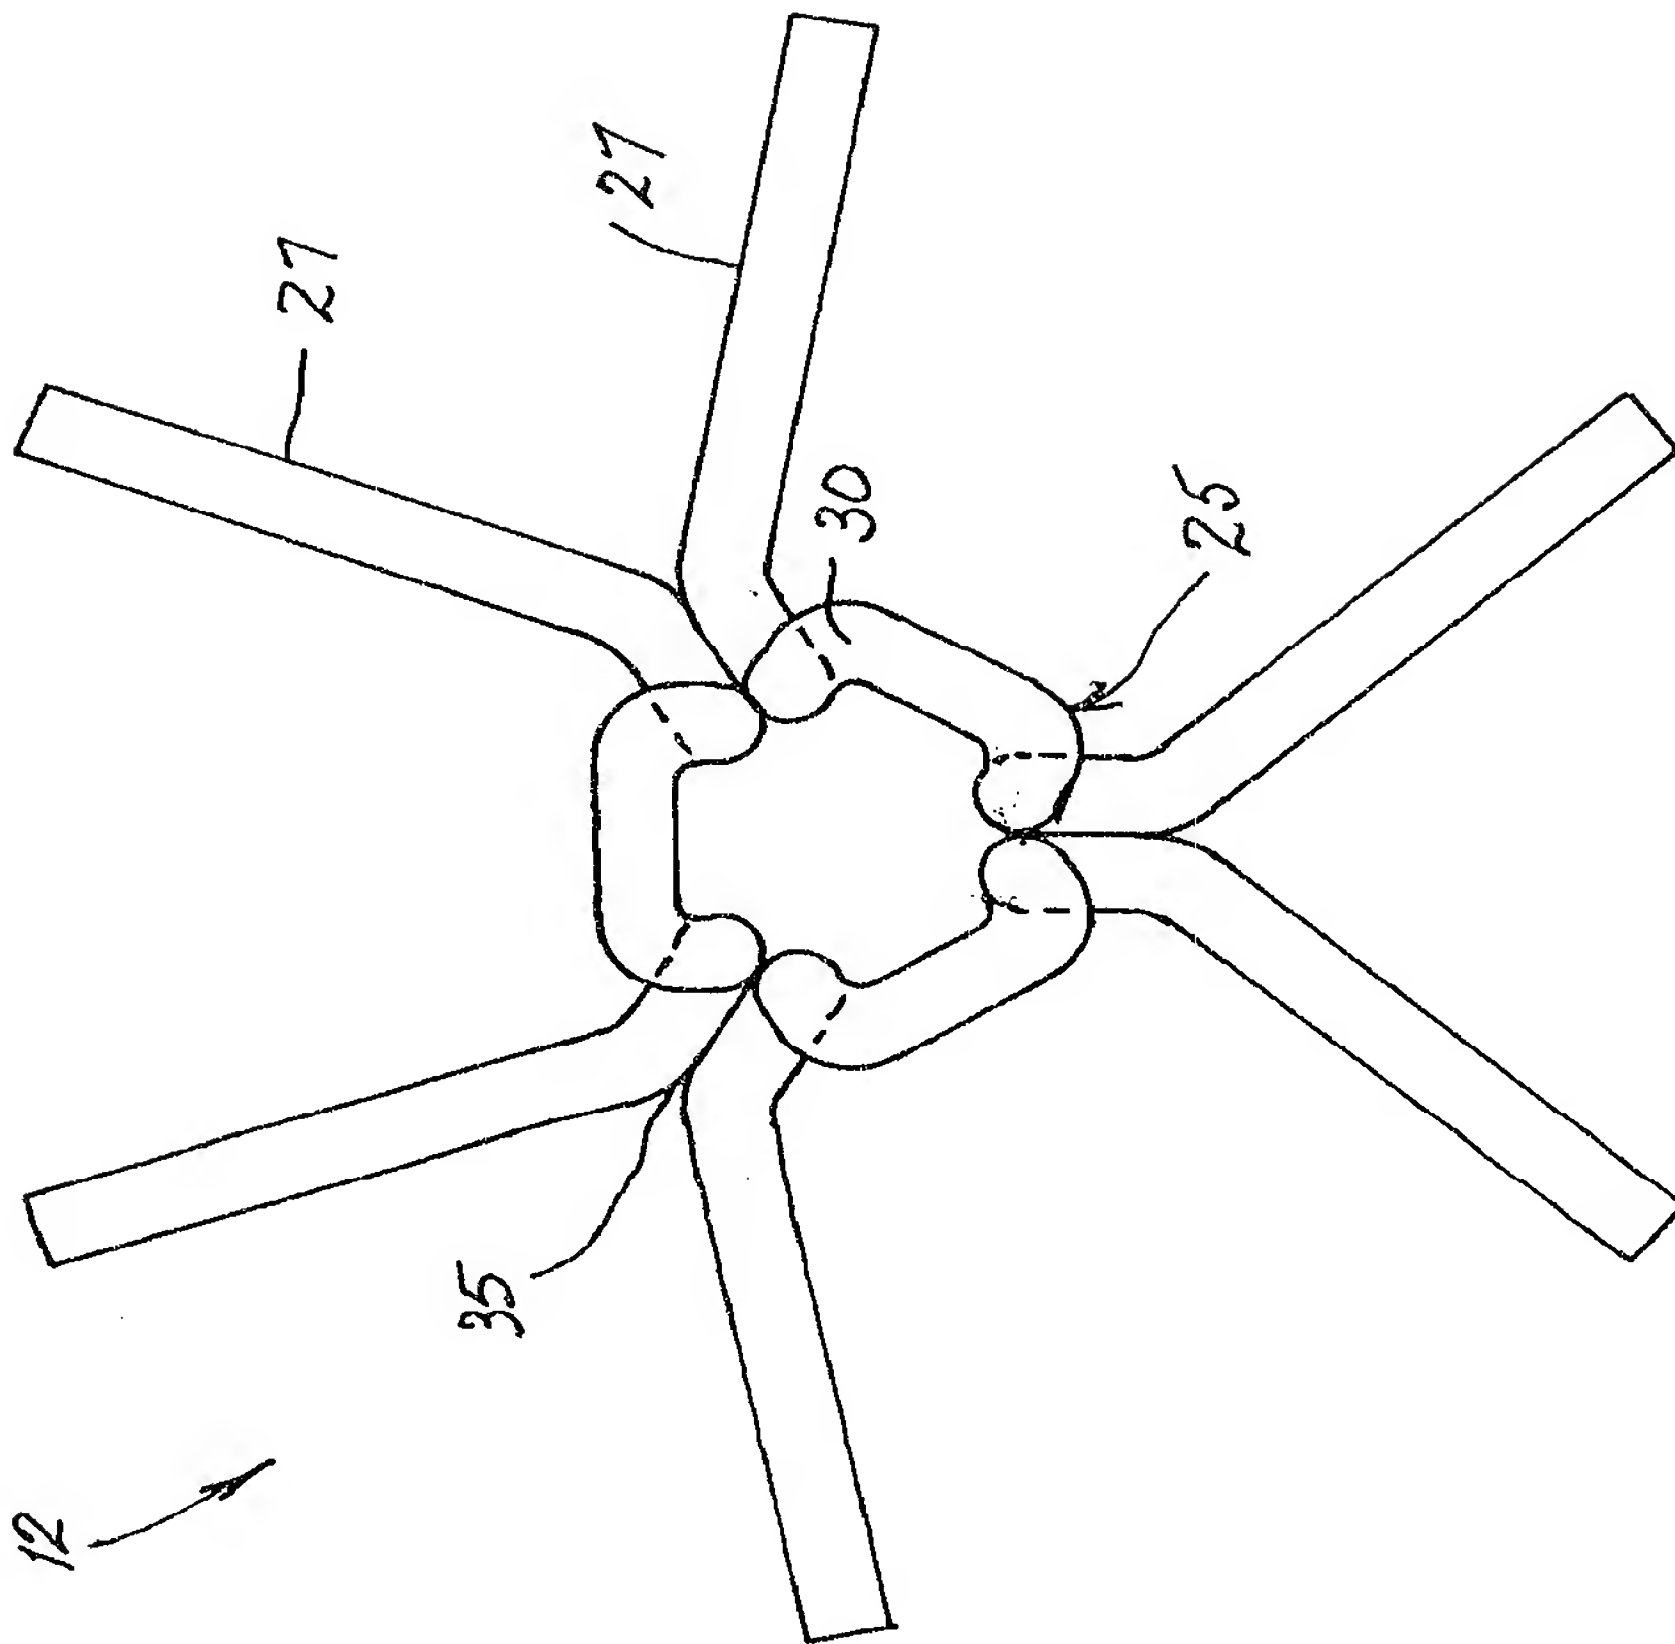


FIG. 13

*Wm. H. Zenger & Co.*

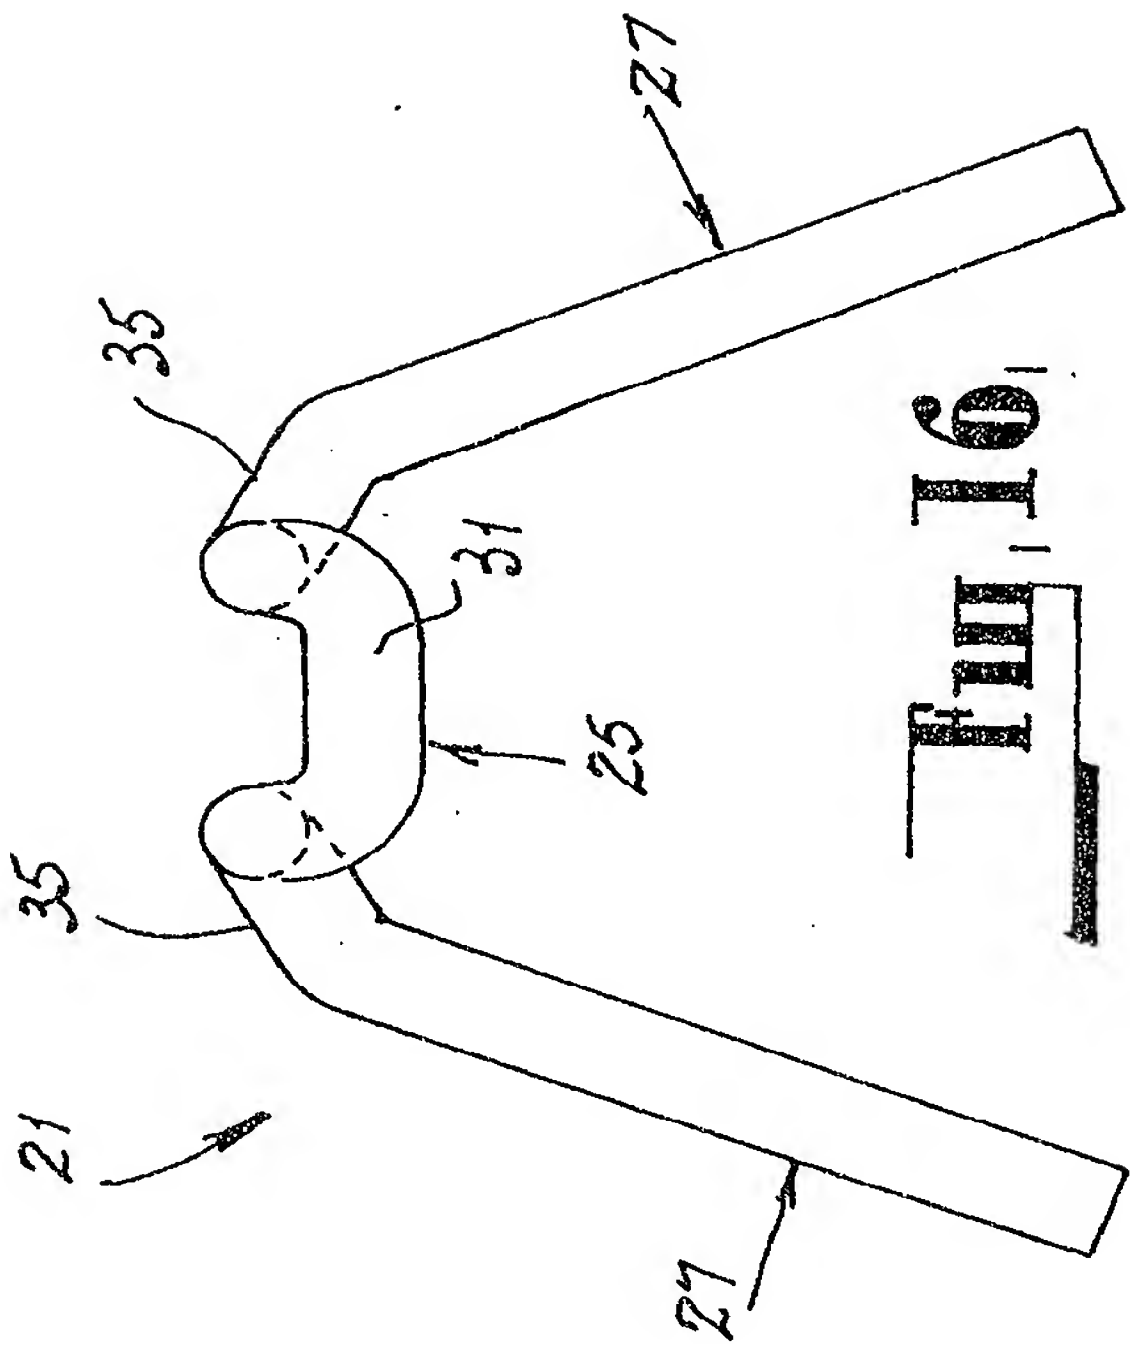


Fig. 16

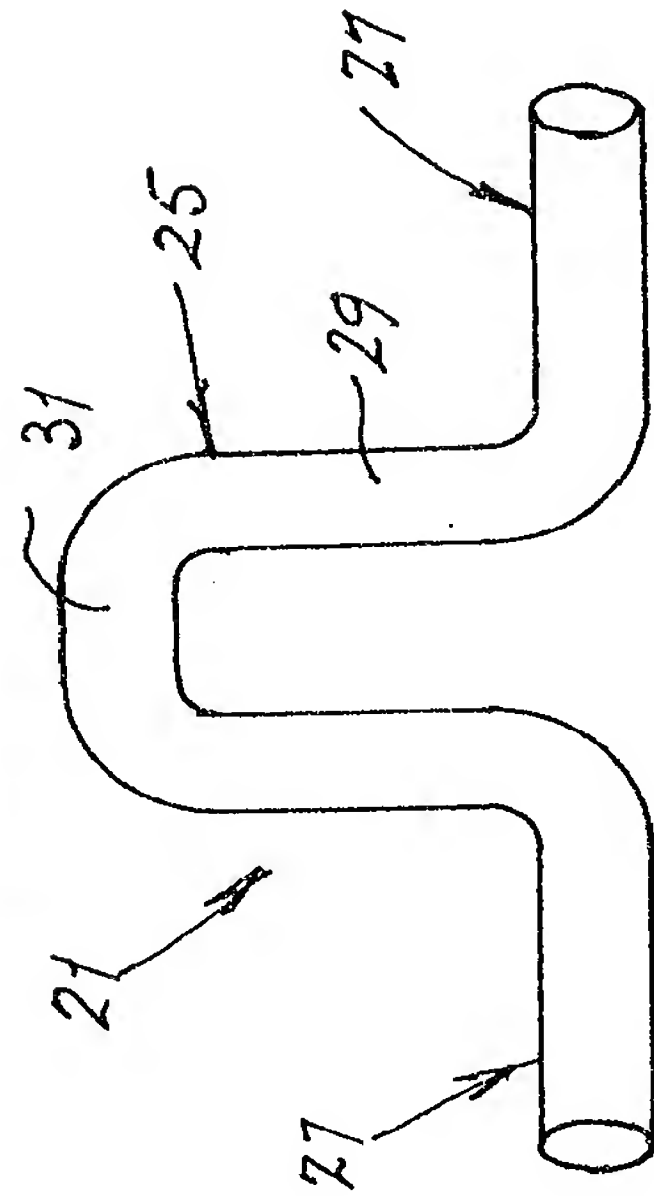


Fig. 14

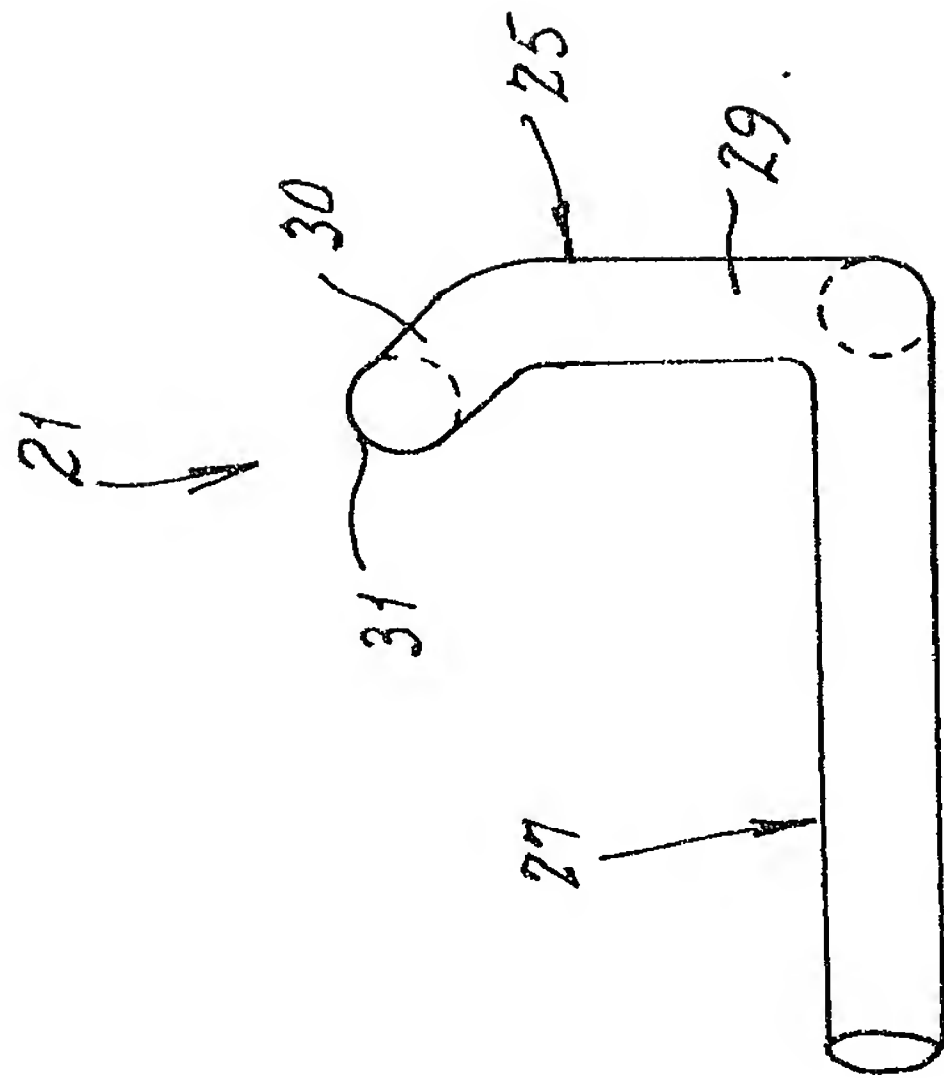


Fig. 15

*W. H. McKeen & Hubert*